


First Industrial Commercial Slab Lift Cincinnati, OH

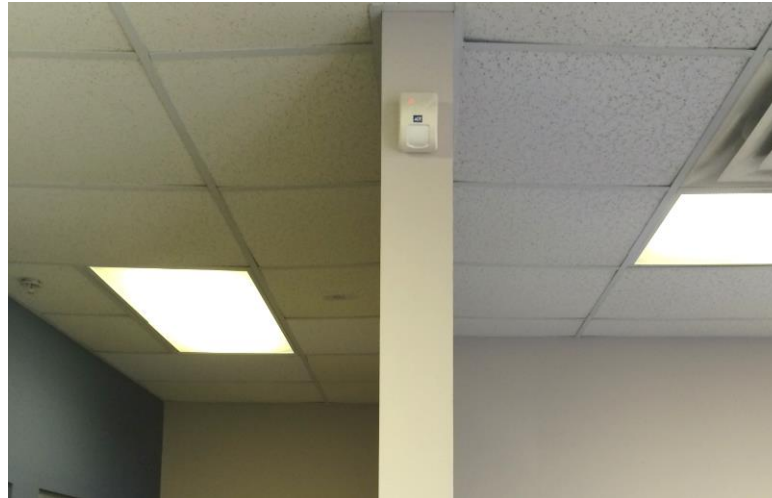

Project Challenges	Solution	Support	Outcome
<ul style="list-style-type: none"> Weak soils had caused slab settlement along front of building Settlement had caused tripping hazard for tenants Windows and drywall were cracking due to settlement 	<ul style="list-style-type: none"> Lift and stabilize the slabs by injecting URETEK high-density polyurethane foam Slabs were lifted to eliminate tripping hazard Soils stabilized to protect from future settlement 	<ul style="list-style-type: none"> URETEK worked with the client to design the injection plan 	<ul style="list-style-type: none"> Minimal intrusion: Work performed in 1 day. Slabs stabilized and lifted: The operation was successful, stabilizing and lifting about 900 square feet.